

PCT

REC'D 08 AUG 2001

WIPO PCT

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference 701570PCT	<b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/CA00/00708	International filing date (day/month/year) 13/06/2000	Priority date (day/month/year) 15/06/1999
International Patent Classification (IPC) or national classification and IPC B29C70/78		
Applicant MAGNA INTERIOR SYSTEMS, INC. et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.



2. This REPORT consists of a total of 8 sheets, including this cover sheet.

- ☐ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☒ Certain defects in the international application
- VIII ☒ Certain observations on the international application

Date of submission of the demand  05/01/2001	Date of completion of this report  06.08.2001
Name and mailing address of the international preliminary examining authority:   European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer  Kujat, C  Telephone No. +49 89 2399 2360  

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/CA00/00708

## I. Basis of the report

1. With regard to the **elements** of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17)*):

**Description, pages:**

1-20 as originally filed

**Claims, No.:**

1-21 as originally filed

**Drawings, sheets:**

1/3-3/3 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
- ☐ the claims, Nos.:

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/CA00/00708

☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

*(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)*

6. Additional observations, if necessary:

## V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

### 1. Statement

Novelty (N)	Yes:	Claims	3-5,11-20
	No:	Claims	1,2,6-10,21
Inventive step (IS)	Yes:	Claims	3-5,11-20
	No:	Claims	
Industrial applicability (IA)	Yes:	Claims	1-21
	No:	Claims	

2. Citations and explanations  
**see separate sheet**

## VII. Certain defects in the international application

The following defects in the form or contents of the international application have been noted:  
**see separate sheet**

## VIII. Certain observations on the international application

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:  
**see separate sheet**

**Re l t m V**

**Reasoned statement under Rule 66.2(a)(ii) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

Reference is made to the following document:

D1: FR 2151651

- 1.1 The subject-matter of **claim 1** (construed as a combination of the features of **claims 1 and 2** for the reasons presented in paragraph 4.1 of this communication) lacks novelty over the disclosure of the document D1:

D1 discloses a

process for making a panel structure mountable in a vehicle to form a part of the interior thereof (page 1, lines 2 and 3: "éléments de garnissage... dans l'industrie automobile"), the process comprising:

placing the ornamental components (page 3, line 11 and figure 2, detail 10: "une nappe") on a mould surface (see figure 2), each of the ornamental components having an outer surface facing the mould surface and remaining surfaces not facing the mould surface (see figure 2);

spraying (page 2, line 30: "pulvérisée ... par pistoletage") a thin outer layer (page 2, line 28: "pellicule 7") on the remaining surfaces of the ornamental components and on portions of the mould surface not covered by the ornamental components (see figure 2) to adhere the outer layer with and integrate the outer layer to the ornamental components [the outer layer applied in D1 is polyurethane (page 2, line 29), which polymerizes (page 2, line 36) and, thus, adheres]; and

applying a resin formulation over the inner surface of the outer layer while the outer layer is on the mould surface (page 2, lines 36 to 39) to create an inner layer adhered to the outer layer [the inner layer applied in D1 is also made of polyurethane (page 2, line 37), which adheres after polymerization];

further comprising uniting \*\* the layered composite structure after the formation thereof with the reinforcing structure so that the reinforcing substrate reinforces the layered composite structure and the ornamental components integrated with the layered composite structure \*.

- \* Document D1 implicitly discloses a reinforcing substrate. For the example of a seat cushion given in figures 1 and 2, the metal seat frame, on which the cushion is mounted, is considered being such a reinforcing substrate. The other examples ("éléments de garnissage", disclosed on page 2, line 3, which implicitly disclose door-panels or instrument-panels for the person skilled in the art of components for vehicle interiors) also implicitly disclose the use of a reinforcing substrate, because the person skilled in the art of components for vehicle interiors is well aware of certain requirements for those components with regard to rigidity, handling and mount ability. Therefore, he automatically foresees a reinforcing structure such as a backing layer of thermoplastic polymer (as can be found in most door panels commercially available).

- \*\* The step of mounting the seat cushion (figures 1 and 2) on the metal seat frame is considered "uniting". For the implicitly disclosed door-panels or instrument-panels, the step of over moulding the layered composite structure with a thermoplastic backing layer is considered "uniting".

1.2 Dependent **claims 3 to 5** do not contain any features which, in combination with the features of any claim to which they refer, meet the requirements of the PCT in respect of inventive step, because:

1.2.1 The ranges of values disclosed in claims 3 and 4 are merely straightforward possibilities from which the skilled person would select, in accordance with circumstances, without the exercise of inventive skill, in order to solve the problem posed.

1.2.2 Concerning the additional features of claim 5, microcrystalline wax mold releasing agents, are commonly used in moulding processes. They are well known to the person skilled in the art.

1.3 Dependent **claims 6 and 7** do not contain any features which, in combination with the features of any claim to which they refer, meet the requirements of the PCT in respect of novelty, because the additional features of claims 6 and 7, a door panel and an instrument panel, are implicitly disclosed by D1 (page 1, line 3: "élément

de garnissage") for the person skilled in the art of vehicle interiors.

- 2.1 Notwithstanding the objection raised in paragraph 3.1 of this communication, the subject-matter of pseudo-independent **claim 8** (in combination with **claim 9** for the same reasons as given above) lacks novelty over the disclosure of **D1** for the same reasons as given in paragraph 1.1 of this communication. Especially, since the features "coloring agent" and "light-stable cross linker" are implicitly disclosed by **D1** due to the automotive application.
- 2.2 The additional feature of dependent **claim 10** has already been disclosed in **D1** (page 2, lines 36 to 39). Thus, its incorporation into any claim to which claim 10 refers will not render the claim novel.
- 2.3 Dependent **claims 11 to 20** do not contain any features which, in combination with the features of any claim to which they refer, meet the requirements of the PCT in respect of inventive step, because:
- 2.3.1 The additional features of dependent **claims 11 to 16 and 18** are merely one of several straightforward possibilities from which the skilled person would select, in accordance with circumstances, without the exercise of inventive skill, in order to solve the problem posed.
- 2.3.2 The additional features of dependent **claim 17** have already been disclosed in dependent **claim 5**. See paragraph 1.2.2 of this communication.
- 2.3.3 The additional features of dependent **claim 19** have already been disclosed in dependent **claim 6**. See paragraph 1.3 of this communication.
- 2.3.4 The additional features of dependent **claim 20** have already been disclosed in dependent **claim 7**. See paragraph 1.3 of this communication.
- 2.4 Notwithstanding the clarity-objections raised in paragraph 4.4 of this communication, the subject-matter of **independent claim 21 also lacks novelty over the disclosure of D1** for the same reasons as given in paragraph 1. The relevant disclosures being: ornamental component (page 3, line 11: "une nappe

10"), inner layer (page 2, line 28: "pellicule 7") and reinforcing substrate (page 2, line 39: "use mousse 9").

**Re Item VII**

**Certain defects in the international application**

- 3.1 Claim 8 comprises all the features of claim 1 [the features "spraying a water dispersed composition..", "applying sufficient heat..." and "substantially drying..." of claim 8 appear to be a more specific formulation of the feature "spraying a thin outer layer..." of claim 1 (see page 5 of description)] and is therefore not appropriately formulated as a claim dependent on the latter (Rule 6.4 PCT)
- 3.2 The features of claims 1 to 21 are not provided with reference signs placed in parentheses (Rule 6.2(b) PCT).
- 3.3 Contrary to the requirements of Rule 5.1(a)(ii) PCT, the relevant background art disclosed in the document D1 is not mentioned in the description, nor is this document identified therein.

**Re Item VIII**

**Certain observations on the international application**

- 4.1 Claim 1 is directed to a process for making a product (panel structure). While the product is described as comprising a reinforcing substrate (line 2 of claim 1), the process steps of claim 1 do not comprise the application of such a reinforcing substrate. Therefore, a lack of clarity arises (Art. 6 PCT), because it appears that the applicant tries to extend the scope of protection also to products without reinforcing substrates.  
That clarity objection could be relieved by incorporating the additional process step of dependent claim 2 into an amended claim 1.

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT - SEPARATE SHEET**

---

International application No. PCT/CA00/00708

- 4.2 Lack of clarity (Art. 6 PCT) arises from the frequent use of the term "about" in dependent claims 3, 4, 15 and 16 (PCT-Gazette, section IV, chapter III-4.5a).
- 4.3 Lack of clarity (Art. 6 PCT) arises from the term "panel-like" structure in claims 8 and 21, because it is not clear how to distinguish a "panel structure" from a "panel-like structure". Especially since "panel structure" and "panel-like structure" appear to be used synonymously in claims 8 and 21 (see first two lines of each claim).
- 4.4 The wording of independent claim 21 lacks clarity (Art. 6 PCT), because the feature "outer layer" is not defined in the context of claim 21. It appears from the description (page 3, lines 7 to 19), that the resin formulation is sprayed over the ornamental component.  
The clarity objection could be relieved by replacing the term "outer layer" with the term "ornamental component".



(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
21 December 2000 (21.12.2000)

PCT

(10) International Publication Number  
**WO 00/76753 A1**

- (51) International Patent Classification<sup>7</sup>: **B29C 70/78**, 39/10 (74) Agent: **IMAI, Jeffrey, T.**; Magna International Inc., 337 Magna Drive, Aurora, Ontario L4G 7K1 (CA).
- (21) International Application Number: **PCT/CA00/00708** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date: **13 June 2000 (13.06.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data: **60/139,757** **15 June 1999 (15.06.1999)** **US** (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): **MAGNA INTERIOR SYSTEMS, INC.** [CA/CA]; 337 Magna Drive, Aurora, Ontario L4G 7K1 (CA).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **WILLIAMS, Ian, S.** [US/US]; 5601 E. Eaalen Rd., Howell, MI 48843 (US). **STAUFFER, Thomas, R.** [US/US]; 8259 Chilsom, Pickney, MI 48169 (US). **GARDNER, John, A., Jr.** [US/US]; 48A Baker Avenue, Deerfield, NH 03037 (US). **O'BRIEN, Timothy, F.** [US/US]; 1321 Corey Cove, White Lake, MI 48383 (US). **GAUDREAU, Laurent, R.** [US/US]; 74 West 5th Street, North Berwick, ME 03906 (US).
- Published:
- *With international search report.*
  - *Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **PROCESS OF MAKING DECORATIVE AUTOMOTIVE INTERIOR TRIM ARTICLES WITH INTEGRATED COMPONENTS**

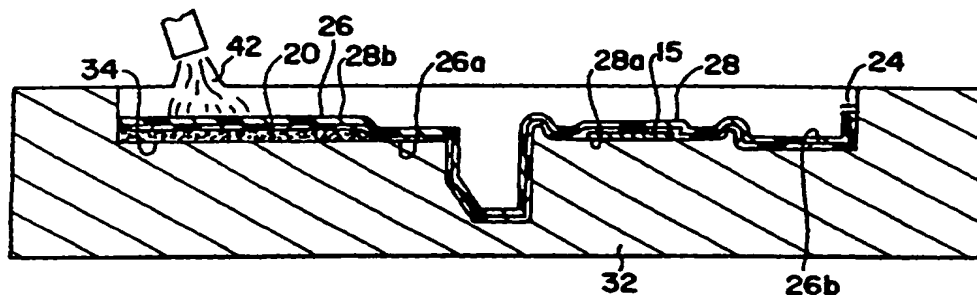

(57) Abstract: A panel structure mountable in a vehicle to form a part of the interior thereof generally includes a layered composite structure, a reinforcing substrate, and one or more ornamental components (15, 20) facing the interior of the vehicle. In a novel process for making the panel structure, the ornamental components (15, 20) are placed on a mold surface (34), each of the ornamental components having an outer surface facing the mold surface (34) and remaining surfaces not facing the mold surface. A thin outer layer is sprayed (42) on the remaining surfaces of the ornamental components and on portions of the mold surface not covered by the ornamental components to adhere the outer layer with and integrate the outer layer to the ornamental components. Next, a resin formulation is applied over the inner surface of the outer layer while the outer layer is on the mold surface to create an inner layer adhered to the outer layer, the inner and outer layers collectively forming the layered composite structure.

WO 00/76753 A1

## **PROCESS OF MAKING DECORATIVE AUTOMOTIVE INTERIOR TRIM ARTICLES WITH INTEGRATED COMPONENTS**

### **Related Applications**

- 5           Priority is claimed based on U.S. Provisional Application No. 60/139,757 filed in the U.S. Patent & Trademark Office on June 15, 1999, the complete disclosure of which is incorporated herein by reference.

### **Field of the Invention**

- 10           This invention relates to a process of making automotive interior trim articles containing a panel structure mountable in an automobile vehicle, and in particular to automobile interior trim articles, such as instrument panels and door panels, which include integrated ornamental components, especially molded ornamental components.

### **15 Description of the Related Art**

- Interior panels such as door panels and instrument panels generally include bodies formed from a decorative plastic covering that is supported on a rigid support structure and has mounted thereon a variety of ornamental components. Among components commonly found in vehicles are speaker grilles, cloth or other molded bolsters, map pockets, weather  
20 seals, wood-grain trim, and the like.

- Production of interior panels conventionally involves the formation of the decorative plastic covering on the rigid support structure, followed by the post-application of the ornamental components. The post-application of ornamental components is by its very nature characterized by several drawbacks. For example, the post-application step requires  
25 the precise placement and fastening of the components onto the interior panel covering. Moreover, to permit fastening of the components to the interior panel covering, the components usually require a backing component. These tasks can be very time-consuming and labor intensive, and often results in the presence of unwanted gaps between the components and interior panel covering. Additionally, the presence of an additional  
30 processing step increases tooling and capital costs and labor requirements.

- Thus, there is a significant need in the art for a process for producing interior panels in which the requirement for mechanical fasteners is significantly lessened or eliminated, and in which the labor and capital expenditure costs are reduced without compromising the quality of the interior panel product. The process should desirably permit the precise  
35 positioning of the ornamental components without difficulty, and obviate the problems

associated with the presence of gaps between the ornamental components and interior panel covering by decreasing the size of the gaps or eliminating the gaps altogether.

### Summary of the Invention

5 It is, therefore, an object of this invention to solve the aforementioned problems associated with the related art as well as to address the need expressed above. In accordance with the principles of this invention, this and other objects are attained by providing a process for making a panel structure which is mountable to an automobile vehicle and comprises a layered composite structure, a reinforcing substrate, and one or more ornamental components  
10 integrated with the layered composite structure.

In accordance with one embodiment of this inventive process, the layered composite structure is formed by a series of steps which include placing one or more ornamental components onto a mold surface, then establishing on exposed portions of the mold surface and components a thin outer layer with an exterior surface having an opaque visual  
15 appearance. Next, an inner layer is formed over the inner surface of the outer layer while the outer layer is on the mold surface to adhere the outer layer thereto and create the layered composite structure. Finally, the layered composite structure is united with the reinforcing substrate so that the reinforcing substrate reinforces the layered composite structure and the ornamental component or components integrated with the layered composite structure.  
20 Optionally, a soft cellular foam layer can be interposed between the inner layer and the reinforcing substrate.

Since the layered composite structures produced in accordance with this invention have an outer layer that can be formed by uniformly spraying of a precursor composition onto a heated mold surface and rear surfaces of ornamental components, the ornamental  
25 components are integrated into the layered composite structure without requiring a separate post-production step to attach the ornamental components with the skin. The adhesive strength of the outer layer integrates the ornamental components, thereby significantly reducing or eliminating the need for mechanical fasteners to mount the ornamental components. Moreover, because the post-application step is eliminated or simplified, labor  
30 and tooling costs are advantageously reduced.

The layered composite structure made in accordance with this invention also exhibits excellent chemical, scuff and mar resistance to external influences. Further, appropriate additives can be introduced into one or more of the layers of the layered composite structure to provide the composite structure with the non-reflective and low gloss surface appearance  
35 desired for such panel structures. Furthermore, both the inner and outer layers of the layered composite structure are characterized by excellent extensibility, such that the layered

composite structure can withstand indentation and flexure during use without resulting in fracture of the outer layer over a wide temperature range, such as from -30°C to 120°C.

Another object of this invention is the provision of an automotive interior trim article containing a panel structure, and in particular the provision of a panel structure having an exterior surface which simulates the appearance and feel of authentic leather, yet is integrated with one or more ornamental components.

In accordance with yet another embodiment of this invention, one or more ornamental components are placed onto a mold surface, after which a light-stable skin layer is formed over the backs of the ornamental components and the exposed portions of the mold surface, so that the ornamental components are adhered to the skin layer. Finally, the skin with integrated components is united with the reinforcing substrate so that the reinforcing substrate reinforces the skin and the ornamental component or components integrated therewith. Optionally, a soft cellular foam layer can be interposed between the inner layer and the reinforcing substrate. The skin can then be post painted, if necessary.

The principles of this invention enunciated above are applicable to all types of interior panel structures with which components can be integrated, but have particular applicability to instrument panels (also referred to as dashboards), door panels, and rear interior quarter panels. Moreover, the principles of this invention are applicable to various types of vehicles, including passenger cars, trucks, vans, utility vehicles, and others.

### **Brief Description of the Drawings**

The accompanying drawings illustrate an embodiment of the invention. In such drawings:

FIG. 1 is a sectional view of a door panel constructed in accordance with an embodiment of this invention;

FIG. 2 is a sectional view of a mold surface showing steps of applying ornamental components and, thereafter, a water-dispersed polyurethane composition to a heated mold surface to form a partially crosslinked light-stable polyurethane outer layer;

FIG. 3 is a sectional view similar to FIG. 2 showing a layered composite structure formed on the heated mold surface;

FIG. 4 is a sectional view showing a step of depositing a precursor for a relatively rigid polyurethane cellular foam intermediate layer on the inner layer while the layered composite structure is disposed on a mold surface; and

FIG. 5 is a sectional view showing a step of uniting the layered composite structure with integrated components on a mold surface with a pre-formed relatively rigid substrate disposed on another mold surface.

## Detailed Description of the Invention

Referring now more particularly to the drawings, there is shown in FIG. 1 a panel structure comprising a door panel, generally designated by reference numeral 10, made by a method in accordance with an embodiment of this invention. The panel structure 10 has an exterior surface 10a exposed to the vehicle interior and an interior surface 10b which is hidden from the vehicle interior when the panel-like structure 10 is mounted in the automobile vehicle. The panel-like structure 10 includes a rigid (or reinforcing) substrate 22 having one surface defining the interior surface 10b of the panel-like structure 10.

The panel-like structure 10 further includes a layered composite structure, generally designated by reference numeral 24, comprised of an outer layer 26 having an outer surface 26a (FIG. 2) defining at least a portion of the exposed exterior surface 10a of the panel-like structure 10, and an inner layer 28. At least a portion of the outer layer 26 is exposed to the vehicle interior, while a portion of the outer layer 26 may be hidden from view by a decorative or ornamental component, such as component 15 and rug section 20. Finally, an intermediate layer 30 comprising a relatively rigid (or semi-rigid) polyurethane cellular foam filler is interposed between the inner layer 28 and the rigid substrate 22.

As further illustrated in the drawings, and in particular FIG. 3, the inner layer 28, which is relatively thick in comparison to the outer layer 26, has an outer surface 28a adjacent to a portion of an inner surface 26b of the outer layer 26 and interfacially chemically bonded with the outer layer 26.

As shown in FIG. 2, the method of this first embodiment utilizes a first mold component or part 32 having a first mold surface 34. The first mold component 32 preferably is formulated by electrolytically depositing nickel over a rigid cast epoxy substrate which is secondarily removed at the end of the deposition/plating process to yield a self-supporting mold capable of being mounted and controlled in a tooling module. The first mold surface 34 has a complementary configuration to the desired configuration of the exterior surface 10a, and is grained to define a texture that substantially complements the desired texture of the exposed portion of the outer layer 26 and simulates real leather.

FIG. 2 illustrates the first steps in this embodiment. Ornamental components 15 and 20 are placed on the mold surface in predetermined locations, preferably subsequent to the application of a mold-releasing agent. As referred to herein, ornamental components means decorative and functional items, devices, and trim, including, by way of example, speaker grilles, cloth or molded bolsters, map pockets, weather seals, wood-grain trim, and the like. The ornamental components can be held in place by the contour of the mold surface 34, a vacuum apparatus, and/or mechanical fasteners. Depending on the ornamental component selected, it may be advantageous to mask the component to prevent bleed-through of the

outer layer 26 precursor composition (36). For example, such masking technique would be desirable for speaker grilles.

The outer layer 26 is obtained by applying, preferably by spraying, a water-dispersed composition 36 onto the first mold surface 34 and components 15 and 20. In a preferred embodiment, the water-dispersed composition 36 comprises at least one light-stable thermoplastic polyurethane containing one or more pendent hydroxyl and/or carboxyl functional groups, at least one desired coloring agent, and at least one heat-activated crosslinker. Suitable crosslinkers include blocked, heat-activated diisocyanates, carbodiimide ( $\text{H}-\text{N}=\text{C}=\text{N}-\text{H}$ ), also known as cyanamide, and compounds having a plurality of aziridine groups.

Application of the water-dispersed composition 36 onto exposed portions of the heated first mold surface 34 and the components 15 and 20 (which are heated via transfer conduction from the mold surface 34) induces chemical reaction between the pendent hydroxyl and/or carboxyl functional groups of the light-stable thermoplastic polyurethane and the heat-activated crosslinker to thereby produce a partially crosslinked light-stable polyurethane. The first mold surface 34 should be heated to a sufficient temperature to drive the crosslinking reaction, but should not be so high as to cause delamination of the composition 36 from the mold surface 34. Preferably, the first mold surface 34 is heated to a temperature in a range of from about 60°C (140°F) to about 82.2°C (180°F). The heating of the first mold surface 34 to such elevated temperatures prior to application of the water-dispersed composition 36 thereto also serves to melt and disperse semi-permanent mold releasing agents, such as microcrystalline wax mold releasing agents, applied to the first mold surface 34. The heated mold surface 34 thereby evaporates the wax dispersants and leaves a thin residue that does not collect in the intricate grain detail of the first mold surface 34.

The water-dispersed composition 36 can be prepared by withdrawing the light-stable thermoplastic polyurethane and the heat-activated crosslinker from separate storage chambers in continuous, metered streams, and mixing these constituents immediately prior to contact with the first mold surface 34. Alternatively, the light-stable thermoplastic polyurethane and the crosslinker constituents can be stably premixed, or "hot-potted", for up to about 24 hours at room temperature before application. This technique is known as "hot-potting" since the thermoplastic polyurethane and crosslinker slowly react with each other at room temperature in a spray pressure pot. If the admixture is hot-potted for more than about 24 hours at room temperature before application of the water-dispersed composition 36 onto the first mold surface 34, the resulting crosslinked light-stable polyurethane exhibits inferior solvent and wear resistance properties and extensibility and may not provide an idealized

bond to the inner layer 28. The water-dispersed composition 36 may be formed from a colloid solution of resin particles, which is added to water to disperse the resin particles in the water.

Once the crosslinked light-stable polyurethane has been formed on the first mold surface 34, the water-dispersed composition 36 is substantially dried while being retained on the first mold surface 34 to obtain the outer layer 26 integrated with components 15 and 20. The crosslinked light-stable polyurethane can be subjected to a heat source to induce evaporation of the water and solvent therefrom and coalesce the resin particles to form the outer layer 26 with the outer surface 26a adjacent to the first mold surface 34. Such heat source is preferably integrated with the first mold 32, and preferably heats the first mold surface 34 to an elevated temperature of about 65.6°C (150°F) or higher. At least a portion of the outer surface 26a of the outer layer 26 has the desired touch, color, and grain-like configuration of the panel-like structure 10.

The spraying of the water-dispersed composition 36 onto and the formation of the outer layer 26 (by heating) on the components 15 and 20 integrates the components with the outer layer 26 via the adhesive properties of the composition 36. As a result, post-processing applications of the components 15 and 20 to the layered composite structure 24 are circumvented, thereby improving the overall efficiency of the process and reducing the labor and capital investment required to make the article 10. As referred to herein, integrated means that the ornamental components can be supported by the layered composite structure 24 by the adhesive properties of the outer layer 26 and inner layer 28 independent of mechanical fasteners. However, the existence of the integrated connection between the outer layer 26 and ornamental components does not foreclose or preclude the use of die locks, mechanical fasteners or the like as supplemental fastening means.

Generally, the outer layer 26 has a thickness in a range of from about 0.002 cm to about 0.0038 cm (that is, from about 0.8 mils to about 1.5 mils ; or from about 0.0008 inch to about 0.0015 inch). The particular coloring agent selected can directly influence the desired thickness of the outer layer 26. Darker colors, such as grays and browns, usually only require a relatively small film thickness to mask the color of the inner layer 28, whereas lighter colors such as reds and blues usually dictate the provision of a relatively larger thickness to obtain an opaque, non-transparent outer layer 26 that conceals the inner layer 28 from view.

Next, the polyurethane elastomer inner layer 28, as is depicted in FIG. 3, is formed by spraying a rapidly reacting composition 42 onto the inner surface 26b of the outer layer 26 while the outer layer 26 is retained on the first mold surface 34 in a substantially dry state.

The inner layer 28 can be made from one or more base polymers that can be sprayed, cast, or otherwise applied by conventional techniques. Suitable base polymers include, for

example and without limitation, PVC, thermoplastic polyurethanes, thermoplastic polyolefins, thermoplastic elastomers, and any combination thereof. The composition 42 for forming the inner layer 28 can also contain one or more additives. Preferably, at least one of the base polymers and/or the additives is highly reactive with unreacted, residual functional groups of the crosslinker in the outer layer 26 that have not reacted with the pendent functional groups of the polyurethane of the outer layer 26. Unreacted functional groups of the crosslinker penetrate into the inner layer 28 and provide reactive sites for crosslinking the polyurethane of the outer layer 26 with the inner layer 28. An interfacial chemical bond between the inner surface 26b of the outer layer 26 and the adjacent outer surface 28a of the inner layer 28 can thereby be formed. The layered composite structure 24 is thus obtained. If the crosslinking is performed under optimum crosslinking conditions, the boundary between the outer and inner layers 26 and 28 of the layered composite structure 24 can become visually indistinct, such that a transition phase appears at the interface of the two layers. As referred to herein, interfacial chemical bonding encompasses, but is not limited to, such crosslinking reactions in which the interfacial boundary between the outer and inner layers 26 and 28 is visually indistinct and inseparable.

In a preferred embodiment, the inner layer 28 is prepared from a polyurethane elastomer, and even more preferably from an aromatic polyurethane elastomer. The polyurethane elastomer inner layer 28 may be formed by spraying a rapidly reacting composition 42 onto the inner surface 26b of the outer layer 26 while the outer layer 26 and components 15 and 20 are retained on the first mold surface 34 in a substantially dry state. The rapidly reacting composition 42 preferably contains at least one aromatic polyisocyanate and at least one polyol, which react with each other to form the non-light-stable polyurethane elastomeric inner layer 28. As referred to herein, the term elastomer encompasses a resilient polymer composition stretchable under moderate tension and compressible and having a relatively high tensile strength and memory so that, upon release of the tension, the elastomer retracts into and recovers its original dimensions or dimensions substantially similar to its original dimensions.

In addition to being reactive with the polyisocyanate constituent, the polyol constituent of the rapidly reacting composition 42 can contain one or more pendent hydroxyl and/or carboxyl functional groups that are highly reactive with unreacted functional groups of the crosslinker of layer 26, which is preferably a blocked, heat-activated diisocyanate, in the outer layer 26 that have not reacted with the pendent functional groups of the polyurethane of the outer layer 26. Unreacted functional groups of the blocked, heat-activated diisocyanate penetrate into the inner layer 28 and react with the pendent functional groups of the polyol constituent. As a result, the blocked, heat-activated diisocyanate



crosslinks the polyurethane of the outer layer 26 with the polyurethane elastomer of the inner layer 28 and thereby forms an interfacial chemical bond between the inner surface 26b of the outer layer 26 and the adjacent outer surface 28a of the inner layer 28. The layered composite structure 24 is thus obtained.

5           Generally, provisions should be taken to ensure that an adequate interfacial chemical bond is achieved between the inner surface 26b of the outer layer 26 and the adjacent outer surface 28a of the inner layer 28. For example, once the blocked, heat-activated diisocyanate is activated by heat, the crosslinking reaction between the heat-activated light-stable diisocyanate and the pendent hydroxyl and/or carboxyl reactive groups of the thermoplastic  
10 polyurethane goes to completion within minutes, leaving the heat-activated light-stable diisocyanate with substantially no residual reactive sites for crosslinking the polyurethane of the outer layer 26 with the polyol constituent of the rapidly reacting composition 42. Therefore, the rapidly reacting composition 42 generally should be applied within six minutes, and preferably within two to four minutes, of completing the application of the  
15 water-dispersed composition 36 to the first mold surface 34. Significant delays in applying the rapidly reacting composition 42 also can cause the outer layer 26 to constrict and delaminate from the first mold surface 34. As a consequence of delamination, the outer layer 26 will not have a shape complementary to the configuration of the first mold surface 34, and the entire composite 24 will have to be disposed of as scrap.

20           On the other hand, if the thermoplastic polyurethane of the water-dispersed composition 36 is not given sufficient time to crosslink before the rapidly reacting composition 42 is applied thereon, the polyol component of the rapidly reacting composition 42 can undergo a condensation reaction with unreacted hydroxyl and/or carboxyl pendent functional groups of the polyurethane of the outer layer 26 to form ester or ether linkages,  
25 respectively. While some formation of these linkages can advantageously enhance the interfacial chemical bond, the condensation reactions release water, which in excess amounts can act as a blowing agent and undesirably increase the cellularity of the inner layer 28 and interfere with the interfacial chemical bond.

          The interfacial chemical bond is further enhanced by separately storing the highly  
30 reactive polyol and aromatic polyisocyanate constituent components of the rapidly reacting composition 42 in separate storage chambers and spraying these components on the inner surface 26b of the outer layer 26 so as to avoid contact between these components until spraying is conducted. A suitable dual nozzle spraying mechanism for accomplishing this task is disclosed in U.S. Patent Nos. 5,028,006 and 5,071,683. By keeping these components  
35 separate until immediately prior to spraying, a portion of the polyol reacts with the heat-activated diisocyanate (and the hydroxyl and/or carboxyl pendent functional groups of the

thermoplastic polyurethane) before all of the polyol can completely react with the polyisocyanate.

Furthermore, given the hygroscopic nature of the aromatic polyisocyanate constituent of the rapidly reacting composition 42, it is important that the outer layer 26 and the surrounding atmosphere (e.g., humidity levels) be substantially dry during this spraying step in order to obtain a strong interfacial chemical bond. While small amounts of moisture may be retained in the outer layer 26, the concentration of such moisture should not be so great as to permit the water to substantially interfere with the reaction between the polyol and polyisocyanate constituents of the rapidly reacting composition 42. Undesirable reactions between the water and the polyisocyanate can disrupt the stoichiometric balance between the polyol and the polyisocyanate, leaving localized unreacted polyol deposits behind on the layered composite structure 24. The water also can serve as a blowing agent, reacting with the polyisocyanate to release carbon dioxide which imparts a cellular structure to the inner layer 28. Excess amounts of water also can deleteriously interfere with the crosslinking reaction effected via the polyol and the residual reactive sites of the blocked, heat-activated diisocyanate.

The rapidly reacting composition 42 is preferably applied to the inner surface 26a of the outer layer 26 at an elevated temperature to advance these objectives. Suitable temperatures to which the first mold component 34 can be heated range, by way of example and without limitation, from about 60°C (140°F) to about 71.1°C (160°F).

As mentioned above, the inner layer 28 can also be formed by casting, for example, a PVC or thermoplastic polyurethane casting composition. Suitable techniques and apparatuses for accomplishing casting are disclosed in the collection of WO 98/57790, U.S. Patent No. 4,623,503, U.S. Patent No. 4,621,995, U.S. Patent No. 5,597,586, and U.S. Patent No. 4,217,325, the complete disclosures of which are incorporated herein by reference.

Generally, the inner layer 28 can have a thickness in a range of from about 0.10 cm to about 0.15 cm (that is, from about 40 mils to about 60 mils; or from about 0.040 inch to about 0.060 inch).

The layered composite structure 24 with integrated components 15 and 20 is then demolded (i.e., removed) from the first mold surface 34. The demolding process is often a relatively labor intensive, tedious, and time consuming task. Formation of tears in or undue stretching of the layered composite structure 24 during demolding can irreversibly ruin and thereby necessitate disposal of the layered composite structure 24 as scrap. Such demolding problems and inefficiencies are largely overcome by practice of this invention, since the interfacial chemical bond between the outer layer 26 and inner layer 28 strengthens the layered composite structure 24 by discouraging separation of the outer and inner layer 26 and

28 during demolding procedures. Moreover, such demolding problems and inefficiencies are further obviated by the use of the aromatic-based elastomer as the inner layer 28, since the aromatic-based elastomer has advantageous physical properties over non-aromatic elastomers.

5           To enhance the releasability from the first mold surface 34 further, the mold surface 34 can be pretreated with a releasing agent prior to the application of the water-dispersed composition 36 and, optionally, prior to the application of the ornamental components 15 and 20. Exemplary releasing agents include, without limitation, high molecular weight microcrystalline wax mold releases, such as Chem-Trend PRC 7140, supplied by Chem-  
10 Trend, Inc. of Howell, Michigan, or PRC 2006, also supplied by Chem-Trend. These mold releasing agents dry quickly on a heated mold within about 5 to about 10 seconds and form a release barrier between the grained mold surface 34 and the outer layer 26. Care should be taken to avoid the accumulation of the mold releasing agent on the first mold surface 34 or excess solids content in the agent, since such accumulation or excess solids content tends to  
15 fill the interstices of the decorative, grained mold surface 34, thereby removing from the exterior surface of the panel structure 10 the appearance of the intricate, hair-like grained configuration of the mold surface 34. Further, the use of excess mold releasing agents can cause the agents to transfer from the first mold surface 34 to the layered composite structure 24 during demolding of the composite structure 24, thus requiring additional wash-removal  
20 and drying steps after demolding and hence a loss in productivity.

          After being demolded from the first mold surface 34, the layered composite structure 24, including the combination of the outer and inner layers 26 and 28 with the components 15 and 20, can be examined for defects with a light source (not shown) while the layered composite structure 24 is positioned on a transparent substrate (not shown). Such defects  
25 usually are present as cosmetic blemishes in the outer layer 26, and may include the presence of tears and rupturable portions lacking sufficient thicknesses to withstand stresses associated with demolding or the further processing steps, especially the uniting step. If minor and isolated, such localized defects can be remedied by post application of additional water-dispersed composition 36 onto the outer layer 26. Additionally, minor tears or thin areas can  
30 be repaired using thermoplastic, heat formable polyurethane tape on the backside 28b of the layered composite structure 24. Advantageously, the need to scrap the entire layered composite structure 24 is thereby averted. As a cautionary note, however, post application spray repair of surface 26a is generally undesirable and its use should be minimized to correcting localized defects, since post application spray repair can negate the grained  
35 leather-like appearance of the outer surface 26a of the outer layer 26 which is transcribed from the first mold surface 36.

As discussed in further detail below, the steps of demolding and examining of the layered composite structure 24 from the first mold surface 36 are not required to be conducted immediately subsequent to the formation of the layered composite structure 24. For example, the layered composite structure 24 optionally can be maintained against the first mold surface 34 until completion of the panel-like structure 10.

After the layered composite structure 24 is demolded from the first mold surface 34 and examined, the layered composite structure 24 is placed on a second mold surface 52 of a second mold part 50. As shown in FIG. 4, the second mold surface 52 is shaped to have a complementary configuration to the exterior surface 10a. Then, a reactive mixture 44 for forming a semi-rigid cellular foam, such as a polyurethane semi-rigid cellular foam, is applied to an inner surface 28b of the inner layer 28 while the composite structure 24 is disposed on the second mold surface 52 to form the intermediate layer 30. The reactive mixture 44 can be applied, for instance, by employing high pressure impingement mixing and a mix-head nozzle. The second mold component 50 is generally heated to a temperature in a range of from about 35°C to about 45°C, and more preferably in a range of from about 35°C to about 40°C, during application of the reactive mixture 44. The mixture 44, which is typically relatively viscous, is in a transient state of reaction during application to the second mold component 50 and begins to foam within seconds of application.

Although the desired thickness of the intermediate layer is partially dependent upon the intended use of the panel structure 10, generally the intermediate layer can have a thickness in a range of from about 5 mm to about 12 mm.

Once the reactive mixture 44 has been applied to the layered composite structure 24 located on the second mold surface 52, a third cooperating mold part or component 60 carrying the pre-formed rigid substrate 22 is moved into cooperating relation with the second mold component 50, as shown in FIG. 5. The third mold component 60 has a third mold surface (unnumbered) with a complementary configuration to the interior surface 10b of the panel-like structure 10. Thereafter, the reactive mixture 44 is foamed and cured, preferably under heat of approximately 43.3°C (110°F) and a self-generated cavity pressure of about 0.8 atm to form the intermediate layer 30. The semi-rigid polyurethane cellular foam serves to unite the layered composite structure 24 with the pre-formed rigid substrate 22 disposed on the third mold surface 60. The panel-like structure including the combination of the layered composite structure 24, the rigid substrate 22, and the intermediate layer 30 then can be removed from the mold parts 50 and 60 with components 15 and 20 integrated thereon.

In its broadest aspects, several variations and modifications to the above-discussed article can be implemented without departing from the scope of this invention. For example,

a non-foamable adhesive can be selected for uniting the layered composite structure 24 to the rigid substrate 22.

In accordance with another variant embodiment, multi water-dispersed compositions containing different coloring agents can be respectively applied to different portions of the panel structure to produce discretely masked colors. Where the selected color or colors are to be changed, in practice it has been found that minimal downtime (on the order of about 0.5 hours) is required.

In accordance with still another variant embodiment, the outer layer 26 can exhibit a dualtone or multitone appearance. This variant embodiment can be accomplished, for example, by abrasive treatment of a portion of the mold surface of the tooling. The greater the amount of abrasive treatment, the duller the appearance of the outer layer 26. A dualtone appearance can be especially desirable for instrument panels, since the upper region of an instrument panel generally should have a low gloss in order to reduce reflectance and veiling glare.

Several variations and modifications to the above-discussed method also can be practiced without departing from the scope of this invention. For example, as mentioned above, the layered composite structure 24 can be retained in the first mold component 32 instead of being demolded and transferred to a second mold component 50 for the uniting step. In accordance with another variant embodiment of this invention, the layered composite structure 24 can be returned to the first mold component 32 after being examined and treated.

In accordance with another variant of this invention, a secondary or alternative heat source can be applied for activating the reaction between the light-stable thermoplastic polyurethane and the crosslinker. For example, the water-dispersed composition 36 can be preheated before being applied to the first mold surface 34, such that the first mold surface 34 does not have to be heated to initiate the reaction between the crosslinker and the light-stable thermoplastic polyurethane.

The illustrated embodiment of this invention can also be modified by applying the reactive mixture 44 for forming the polyurethane semi-rigid cellular foam 30 to the surface of the rigid substrate 22 instead of the layered composite structure 24. Alternatively, the second and third mold components 32 and 50 can be cooperatively engaged to define a cavity between the inner surface 28b of the inner layer 28 and the outer surface of the substrate 22, with the reactive mixture 44 thereafter being injected between the rigid substrate 22 and the composite structure 24.

In order to further elucidate the decorative automotive interior trim article and method of this invention, the following discussion specifies suitable and preferred constituents and

conditions for making the article of this invention and for carrying out the process of this invention.

In a preferred embodiment, the water-dispersed composition 36 used to prepare the outer layer 26 comprises at least one light-stable thermoplastic polyurethane, at least one  
5 desired coloring agent, and at least one crosslinker (preferably one or more blocked, heat-activated aliphatic diisocyanates). The light-stable thermoplastic polyurethane is preferably prepared from a high molecular weight aliphatic thermoplastic polyurethane containing hydroxyl and/or carboxyl pendent functional groups which are chemically reactive with the crosslinker. The average molecular weight of the thermoplastic polyurethane can be in a  
10 range of from about 5000 to about 7000, and more preferably about 6000. An exemplary thermoplastic polyurethane and blocked, heat-activated diisocyanate crosslinker can be obtained from Titan Finishes Corp. of Detroit, Michigan under the trade designation PROTOTHANE WR, WATER BASED IN-MOLD COATING. The diisocyanate may be cyclic or non-cyclic, but should be light stable. As referred to herein, diisocyanates also  
15 encompasses prepolymers having two -NCO groups which are reactive with the thermoplastic polyurethane. An exemplary aliphatic diisocyanate is hexamethylene diisocyanate (HMI), which is available from Bayer, Rhone Poulenc, and Nippon Polyurethane. An exemplary water-dispersed composition comprising a thermoplastic polyurethane and carbodiimide can be obtained from C.F. Jameson & Company, Inc. of  
20 Bradford, Mass. under the trade designation JAMESON WVF SERIES FLEXCOAT IMC. The desired weight ratio of thermoplastic polyurethane to crosslinker for these particular compositions is about 8 to 1 by volume (equivalent ratio of 1.44 thermoplastic polyurethane to 1.08 crosslinker on a dry basis).

The water-dispersed composition 36 can be prepared by providing the thermoplastic  
25 polyurethane component as a colloidal solution in a solvent such as N-methyl pyrrolidone, then dispersing the solution by adding water, the coloring agent, and conventional additives, if desired. Sufficient water (e.g., about 61.1% by weight) can be added so that the solvent concentration in the water-dispersed composition 36 is, for example, about 8.1% by weight before drying.

30 The optional additives in the water-dispersed composition 36 can include, without limitation, any combination of the following: heat and ultra-violet light stabilizers, pH stabilizers to maintain an alkaline state of dispersion, plasticizers, antioxidants, dulling agents, surfactants, colloidal protectants to maintain particles in suspension, carbon black, thixotropic agents (e.g., hydroxy methyl cellulose), and fillers such as clay particles.

35 The water-dispersed composition 36 can contain, for example, about 25% to about 35% solids by weight, and more preferably about 29% solids by weight, about 10% to about

80% water by weight, and more preferably about 61% water by weight, and about 6% to 10% solvents by weight, depending on desired color and additives. An insufficient amount of water in the composition 36 can adversely affect the viscosity of the composition 36 and thus adversely affect the application of the water-dispersed composition 36 onto the first mold surface 34. On the other hand, an excess amount of water in the water-dispersed composition 36 can alter the sprayability and coating efficiency of the water-dispersed composition 36.

To the thermoplastic polyurethane solution may be added a solution of the blocked, heat-activated diisocyanate, which can include as a solvent, for example, 1-methyl-2-pyrrolidine and/or 4-hydroxy-4-methyl-2-pentanone. A discussion of blocked isocyanates is included in Practical Chemistry of Polyurethanes and Diisocyanates, Akron Polymer Laboratories, David Russell (1991), the complete disclosure of which is incorporated herein by reference. The blocked, heat-activated aliphatic diisocyanate is preferably maintained at room temperature and protected from heat until use. When influenced by the heat, such as the heat of the tooling during spraying application, the blocked, heat-activated aliphatic diisocyanate reacts with the hydroxyl and/or carboxyl groups of the thermoplastic polyurethane to crosslink the thermoplastic polyurethane with itself or with polyol constituents of the rapidly reacting composition.

Alternatively, the water-dispersed composition 36 can be prepared by adding to the thermoplastic polyurethane solution a solution comprising the carbodiimide, which can include, for example, glycol ether acetate and/or xylene as the solvent.

#### **Aromatic Polyurethane Elastomer Inner Layer**

Exemplary polyisocyanates that can be selected as part of the composition 42 for forming the inner layer 28 include diisocyanates having aromatic closed-ring structures, such as diphenylmethane diisocyanate prepolymer (MDI prepolymer), which can be obtained from BASF Corp. of Wyandotte, MI. under the trade designation ELASTOLIT M50555T, ISOCYANATE, NPU U05275, or diphenylmethane-4,4'-diisocyanate (MDI), or mixed isomers of MDI or mixtures of the above, which are available from BASF or Dow Chemical Corp. of Midland, MI, Mobay (Bayer) Chemical Corp. of Baytown, Texas, or ICI America of Geismar, LA. The above-mentioned non-light-stable aromatic polyisocyanates are very desirable for use in the inner layer in view of the higher rate of reactivity and completion of property development and better physical properties (e.g., tensile strength, elongation, and tear strength) of these non-light-stable aromatic polyisocyanate when compared to light-stable aliphatic-based isocyanates such as isophorone diisocyanates, in which the -NCO groups are sterically hindered due to their spatial arrangement at either end of the molecule. By contrast, the aromatic diisocyanates preferred for this invention have -NCO groups directly attached to the aromatic ring. In this preferred embodiment, the aromatic

diisocyanates yield faster rates of reaction because of the arrangement and reactivity of the -NCO groups on the aromatic ring structure (e.g., in diphenylmethane diisocyanate) and the availability of the -NCO groups for reaction with the hydrogen donors of the -OH type residing on the organic chain of the polyols of the rapidly reacting composition 42.

5           Suitable polyols for this rapidly reacting composition 42 include, by way of example, polyether polyols having average molecular weights in a range of from about 200 to about 2000 and containing one or more pendent hydroxyl and/or carboxyl groups in addition to primary hydroxyl groups, which can chemically react with unreacted functional -NCO groups of the blocked, heat-activated diisocyanate and the hydroxyl and/or carboxyl pendent  
10 functional groups of the polyurethane of the outer layer 26. An exemplary polyol is ELASTOLIT M50555R NPU U05274 from BASF Corp. of Wyandotte, MI.

The rapidly reacting composition 42 can also contain appropriate additives, including, by way of example and without limitation, any combination of the following: heat and ultra-violet light stabilizers, pH stabilizers, antioxidants, dulling agents, surfactants, carbon black,  
15 chain extenders (e.g., ethylene glycol), thixotropic agents (e.g., amorphous silica), fillers such as clay particles, and catalysts such as tin catalysts (e.g., dibutyltin dilaurate).

#### **Non-Aromatic Polyurethane Elastomer Inner Layer**

Exemplary polyisocyanates that can be selected for making the inner layer 28 include polyisocyanates having closed aliphatic ring structures with pendent -NCO groups, such as  
20 isophorone diisocyanate, which can be obtained from Recticel under the tradename ISOFAST. Also suitable is tetramethyl xylene diisocyanate, which can be obtained from Texaco under the tradename TMXDI.

Suitable polyols for this rapidly reacting composition include, without limitation, polyether polyols having molecular weights in a range of from about 220 to about 250 and  
25 containing one or more pendent hydroxyl and/or carboxyl groups (in addition to primary hydroxyl groups), which can chemically react with unreacted functional -NH groups of the carbodiimide and the hydroxyl and/or carboxyl pendent functional groups of the polyurethane of the outer layer 26. An exemplary polyol is POLYFAST from Recticel.

Additives as mentioned above in connection with the aromatic polyurethane  
30 elastomer may be used for non-aromatic polyurethane elastomer inner layers 28 as well.

#### **Cast PVC Inner Layer**

Where PVC is selected as the base polymer, the casting composition can include one or more plasticizers. In a preferred embodiment, the plasticizers selected for this invention are capable of reacting with the crosslinker (e.g., carbodiimide) in the outer layer 26, so that  
35 the crosslinker can successfully crosslink the polyurethane of the outer layer 26 with the plasticizer of the casting composition. Exemplary plasticizers include, without limitation,



plasticizers having one or more pendent hydroxyl or carboxyl functional groups. These plasticizers are preferably incorporated around the backbone of the base polymer as an internal lubricant.

Preferably, both a low molecular weight plasticizer and a medium molecular weight plasticizer are included in the casting composition having PVC as its base polymer. The low molecular weight plasticizer is selected to provide low temperature flexibility, so that performance of the inner layer 28 at low temperatures, such as -30°C, is not hindered. An exemplary low molecular weight plasticizer is di-2-ethylhexylphthalate (also known as DUP). On the other hand, the medium molecular weight plasticizer is selected to provide high temperature stability to the inner layer 28. An exemplary medium molecular weight plasticizer is trioctyltrimellitate (TOTM).

The amount of low molecular weight plasticizer should be maintained fairly low so as to reduce volatilization and, consequently, window fogging. For example, the weight ratio of low molecular weight plasticizer to PVC base resin in the casting composition can be from about 0.25:100 to about 1:100. The weight ratio of medium molecular weight plasticizer to PVC base resin in the casting composition can be in a range of from about 10:100 to about 40:100, and more preferably in a range of from about 20:100 to about 40:100. If an insufficient amount of medium molecular weight plasticizer is used, the inner layer 28 may not exhibit adequate high temperature aging properties, resulting in, for example, premature stiffening of the inner layer 28 after exposure to elevated temperatures. On the other hand, if an excess amount of medium molecular weight plasticizer is used, the article surface may tend to gloss at elevated temperatures, creating unacceptable surface reflectance.

Where PVC is selected as the base polymer of the casting composition, the casting composition can be prepared by any suitable technique, including suspension or mass polymerization followed by drying to provide a white, free-flowing powder of PVC having, for example, an average particle size of about 350 µm. The resulting PVC powder can then be thoroughly mixed with the plasticizer to form the casting composition by employing any suitable technique, such as high energy compounding. During compounding, the plasticizer is absorbed by the PVC and thereby causes the PVC to swell. Compounding can be performed, for example, at a temperature in a range of from about 60°C (about 150°F) to about 88°C (about 190°F).

The plasticizer selected should impart thermal stability to the PVC powder and be permanent to render the article flexible for the life of the application. Generally, PVC powder consists of discrete particle groups that, when subjected to excessive temperatures, decompose prior to melting. This decomposition liberates hydrogen chloride, which

autocatalytically degrades the PVC. Since the PVC is melted during gelling and fusing steps, a suitable internal plasticizer is mixed with and absorbed in the PVC powder prior to casting in order to inhibit thermal degradation of the PVC and provide the inner layer 28 with a soft, flexible, compressing feel.

5 Preferably, the plasticizer is bound in the PVC matrix with sufficient bond energy to form a permanent part of the polymer matrix and thereby permit the finished fused article to exhibit good flexibility and weathering at super- and sub-ambient conditions in use.

The casting composition having PVC as its base resin can contain appropriate additives, including, by way of example and without limitation, any combination of the  
10 following: heat and ultra-violet light stabilizers, such as hydroquinones; internal lubricants, such as stearic acid; antioxidants; dulling agents; carbon black; and fillers, such as clay and/or diatomaceous earth. Other additives can also be introduced into the inner layer 28 to protect against oxidation and destabilization of the cast PVC. Such additives include barium, calcium, and zinc heat stabilizers, such as barium nonylphenate, calcium carboxylate, and  
15 zinc stearate. These and other additives can be included to form the dry resin material by using, by way of example and without limitation, a high intensity dry powder mixer such as a Henschel mixer.

In addition, the PVC composition can comprise one or more copolymer alloys or blends of PVC and another polymer, such as one or more polyurethanes. Such copolymer  
20 alloys and blends can be prepared by techniques well known to those skilled in the art, such as compounding.

#### **Cast Thermoplastic Polyurethane Inner Layer**

Where a thermoplastic polyurethane is selected as the base polymer for the casting composition, the thermoplastic polyurethane preferably contains at least one ethylenically  
25 unsaturated bond in its backbone and/or hydroxyl groups. In a preferred embodiment, the ethylenically unsaturated bond and/or hydroxyl groups of the thermoplastic polyurethane is/are capable of reacting with the crosslinker (e.g., carbodiimide) in the outer layer 26, so that the crosslinker can successfully crosslink the polyurethane of the outer layer 26 with the polyurethane of the casting composition. Exemplary thermoplastic polyurethanes include,  
30 without limitation, ESTANE (provided by B.F. Goodrich of Akron, Ohio) and PELLETHANE (provided by Dow Chemical Company of Midland Michigan).

The thermoplastic polyurethane of the casting composition can be prepared by, for example, a prepolymerization technique, followed by drying, compounding, chopping, and grinding, to provide a free-flowing powder of thermoplastic polyurethane. Excess polyols  
35 can be provided in preparing the thermoplastic polyurethane of casting composition. As mentioned above, the hydroxyl groups of the excess polyols can serve to promote

crosslinking and the chemical bonding between the outer layer 26 and the inner layer 28.

The resulting thermoplastic polyurethane powder typically has a brownish appearance, and can possess, for example, a 425 mesh size. The powder can contain additives, as needed or required by the intended use, to form the composition by employing any suitable technique, such as introducing the additives during prepolymerization. The weight ratio of the total additives to the base resin can be, for example, in a range of from about 3:100 to about 7:100, depending on the intended use and additives included.

The casting composition including a thermoplastic polyurethane as its base polymer can contain appropriate additives, including, by way of example and without limitation, any combination of the following: heat stabilizers; flexibilizers, such as low molecular weight polyurethanes (incorporated into the backbone, for example, during the compounding or like step); antioxidants; dulling agents; carbon black; fillers, such as clay particles; and free flowing additives. Other additives can also be introduced into the inner layer 28 to protect against scorching. These and other additives can be included to form the dry resin material by using, by way of example and without limitation, a high energy extruder/chopper

In similar fashion, other thermoplastic powders based upon polyolefins or elastomers may be formed. Extruded micropellets of the PVC, TPU, TPO, TPE, or other thermoplastic formulations or combinations thereof may be cast instead of the powder form.

Various blends of polyether polyols and polyisocyanates having suitable resilience properties can be employed to form the semi-rigid polyurethane cellular foam of the intermediate layer 30. For example, the polyisocyanate blend can include methylene diisocyanate. The semi-rigid polyurethane cellular foam also can contain appropriate additives, including, by way of example and without limitation, any combination of the following: surfactants, antioxidants, fillers, stabilizers, catalysts such as tin catalysts (e.g., dibutyl tin dilaurate) and tertiary amines (e.g., diethanolamine), and small amounts of foaming agents such as water. In this regard, it is noted that the condensation reaction between the blends of polyols and polyisocyanates releases water, which reacts with the polyisocyanate to generate carbon dioxide and thereby impart the cellular structure to the intermediate layer 30. Accordingly, a slightly stoichiometric excess of polyol can be provided to form the semi-rigid polyurethane cellular foam.

The rigid substrate 22 may be formed from any material possessing the requisite strength to reinforce and mount the outer layer 26, inner layer 28, and intermediate layer 30. Suitable materials include any material with sufficient rigidity to permit the composite to be mounted into a vehicular sub-structure, including, by way of example, injection molded thermoplastics, such as, without limitation, a styrene maleic anhydride (SMA), acrylonitrile butadiene styrene (ABS), polycarbonates (PC), an alloy of ABS-PC, reinforced reaction

injection molded polyurethanes (RRIM), metals, metal alloys, wood-fiber composites, or any combination thereof.

The rigid substrate 22 may be formed from at least one polyolefin selected from the group consisting of polypropylene, ethylene-propylene copolymers, thermoplastic olefins (TPOs), and thermoplastic polyolefin elastomers (TPEs), with fillers, such as reinforcement nanoparticles, dispersed within the polyolefin. The reinforcement nanoparticles generally comprise less than 15% of the total volume of the rigid substrate 22. The nanoparticles derive their name from the small magnitude of their dimensions. The nanoparticles comprise one or more generally flat platelets, with each platelet having a thickness of between about 0.7 and about 1.2 nanometers. Generally, the platelets each have an average thickness of approximately 1 nm thick, with an aspect ratio (which is the largest dimension divided by the thickness) of about 50 to about 300.

The nanoparticles (including the platelets) are derivable from larger layered mineral particles. Any layered mineral capable of being intercalated may be employed in this invention. Layered silicate minerals are preferred. The layered silicate minerals that may be employed include natural and artificial minerals. Non-limiting examples of more preferred minerals include montmorillonite, vermiculite, hectorite, saponite, hydrotalcites, kanemite, sodium octosilicate, magadite, and kenyaite. Mixed magnesium and aluminum hydroxides may also be used. Among the most preferred materials is montmorillonite. Various other clays can be used, such as claytone H.Y.

To exfoliate the larger mineral particles into their constituent layers, different methods may be employed. For example, swellable layered minerals, such as montmorillonite and saponite are known to intercalate water to expand the inter layer distance of the layered mineral, thereby facilitating exfoliation and dispersion of the layers uniformly in water. Dispersion of layers in water is aided by mixing with high shear. The mineral particles may also be exfoliated by a shearing process in which the mineral particles are impregnated with water, then frozen, and then dried. The freeze dried particles are then mixed into molten polymeric material and subjected to a high sheer mixing operation so as to peel individual platelets from multi-platelet particles and thereby reduce the particle sizes to the desired range.

The reinforcing substrate 22 may be prepared by combining the platelet mineral with the desired polymer in desired ratios. The components may be blended by general techniques known to those skilled in the art. For example, the components can be blended and then melted in mixers or extruders.

Additional specific preferred methods, for the purposes of this invention, for forming a polymer composite having dispersed therein exfoliated layered particles are disclosed in

U.S. Patent Nos. 5,717,000, 5,747,560, 5,698,624, and WO 93/11190, each of which is hereby incorporated by reference. For additional background the following are also incorporated by reference: U.S. Patent Nos. 4,739,007 and 5,652,284.

5 Although the method of this invention has been embodied above in connection with the preparation of a door panel, it is understood that the method is equally applicable to other panel-like structures, including for example instrument panels and interior rear quarter panels, package trays, glove box covers, etc.

10 The foregoing detailed description of the preferred embodiments of the invention has been provided for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise embodiments disclosed. Many modifications and variations will be apparent to practitioners skilled in this art. The embodiments were chosen and described in order to best explain the principles of the invention and its practical application, thereby enabling others skilled in the art to understand the invention for various embodiments and with various modifications as are suited to the  
15 particular use contemplated. It is intended that the scope of the invention be defined by the following claims and their equivalents.

## WHAT IS CLAIMED IS:

1. A process for making a panel structure mountable in a vehicle to form a part of the interior thereof, the panel structure comprising a layered composite structure, a reinforcing substrate, and one or more ornamental components facing the interior of the vehicle, said  
5 process comprising:
  - placing the ornamental components on a mold surface, each of the ornamental components having an outer surface facing the mold surface and remaining surfaces not facing the mold surface;
  - spraying a thin outer layer on the remaining surfaces of the ornamental components  
10 and on portions of the mold surface not covered by the ornamental components to adhere the outer layer with and integrate the outer layer to the ornamental components; and
  - applying a resin formulation over the inner surface of the outer layer while the outer layer is on the mold surface to create an inner layer adhered to the outer layer, the inner and outer layers collectively forming the layered composite structure.
- 15 2. A process according to claim 1, further comprising uniting the layered composite structure after the formation thereof with the reinforcing substrate so that the reinforcing substrate reinforces the layered composite structure and the ornamental components integrated with the layered composite structure.
- 3 A process according to claim 1, wherein the outer layer has a thickness in a range of  
20 from about 0.002 cm to about 0.0038 cm .
4. A process according to claim 1, wherein the inner layer has a thickness in a range of from about 0.10 cm to about 0.15 cm.
5. A process according to claim 1, further comprising the step of precoating the mold surface with a microcrystalline wax mold releasing agent.
- 25 6. A process according to claim 1, wherein the mold surface is shaped to define a corresponding configuration of an exterior surface of a door panel.
7. A process according to claim 1, wherein the mold surface is shaped to define a corresponding configuration of an exterior surface of an instrument panel.
8. A process for making a panel structure mountable in a vehicle to form a part of the  
30 interior thereof, the panel-like structure comprising a layered composite structure, a reinforcing substrate, and one or more ornamental components facing the interior of the vehicle, said process comprising:
  - placing the ornamental components on a mold surface, each of the ornamental components having an outer surface facing the mold surface and remaining surfaces not  
35 facing the mold surface;

spraying a water-dispersed composition on the remaining surfaces of the ornamental components and on portions of the mold surface not covered by the ornamental components, the water-dispersed first composition comprising at least one light-stable thermoplastic polyurethane, at least one desired coloring agent, and at least one light-stable crosslinker;

5       applying sufficient heat to induce partial crosslinking of the light-stable thermoplastic polyurethane with the crosslinker;

substantially drying the water-dispersed composition while on the mold surface so as to establish the outer layer which has an exterior surface with an opaque visual appearance and is integrated to the ornamental components; and

10       applying a resin composition onto an inner surface of the outer layer while the outer layer is on the mold surface to create an inner layer adhered to the outer layer, the inner and outer layers collectively forming the layered composite structure.

9.       A process according to claim 8, further comprising uniting the layered composite structure after the formation thereof with the reinforcing substrate so that the reinforcing  
15       substrate reinforces the layered composite structure and the ornamental components integrated with the layered composite structure.

10       A process according to claim 8, wherein the resin composition contains at least one polyisocyanate and at least one polyol, and wherein the inner layer is crosslinked with the polyurethane of the outer layer via residual unreacted functional groups of the crosslinker to  
20       form interfacial chemical bonding between the inner surface of the outer layer and an adjacent surface of the inner layer.

11.       A process according to claim 10, wherein the polyisocyanate is aromatic, and wherein the crosslinker is a blocked, heat-activated diisocyanate.

12.       A process according to claim 11, wherein the aromatic polyisocyanate is a  
25       diphenylmethane diisocyanate prepolymer or diphenylmethane-4,4'-diisocyanate.

13.       A process according to claim 11, wherein the blocked, heat-activated diisocyanate is hexamethylene diisocyanate.

14.       A process according to claim 10, wherein the polyol contains one or more pendent hydroxyl, carboxyl, or hydroxyl and carboxyl functional groups.

30       15.       A process according to claim 8, wherein the outer layer has a thickness in a range of from about 0.002 cm to about 0.0038 cm .

16.       A process according to claim 8, wherein the inner layer has a thickness in a range of from about 0.10 cm to about 0.15 cm.

17.       A process according to claim 8, further comprising the step of precoating the mold  
35       surface with a microcrystalline wax mold releasing agent.

18. A process according to claim 8, wherein the reinforcing substrate contains nanoparticles.

19. A process according to claim 8, wherein the mold surface is shaped to define a corresponding configuration of an exterior surface of a door panel.


5 20. A process according to claim 7, wherein the mold surface is shaped to define a corresponding configuration of an exterior surface of an instrument panel.

21. A process for making a panel structure mountable in a vehicle to form a part of the interior thereof, the panel-like structure comprising a skin, a reinforcing substrate, and one or more ornamental components facing the interior of the vehicle, said process comprising:

10 placing the ornamental components on a mold surface, each of the ornamental components having an outer surface facing the mold surface and remaining surfaces not facing the mold surface;

spraying a resin formulation over the inner surface of the outer layer while the outer layer is on the mold surface to create an inner layer adhered to the outer layer, the inner and  
15 outer layers collectively forming the layered composite structure.



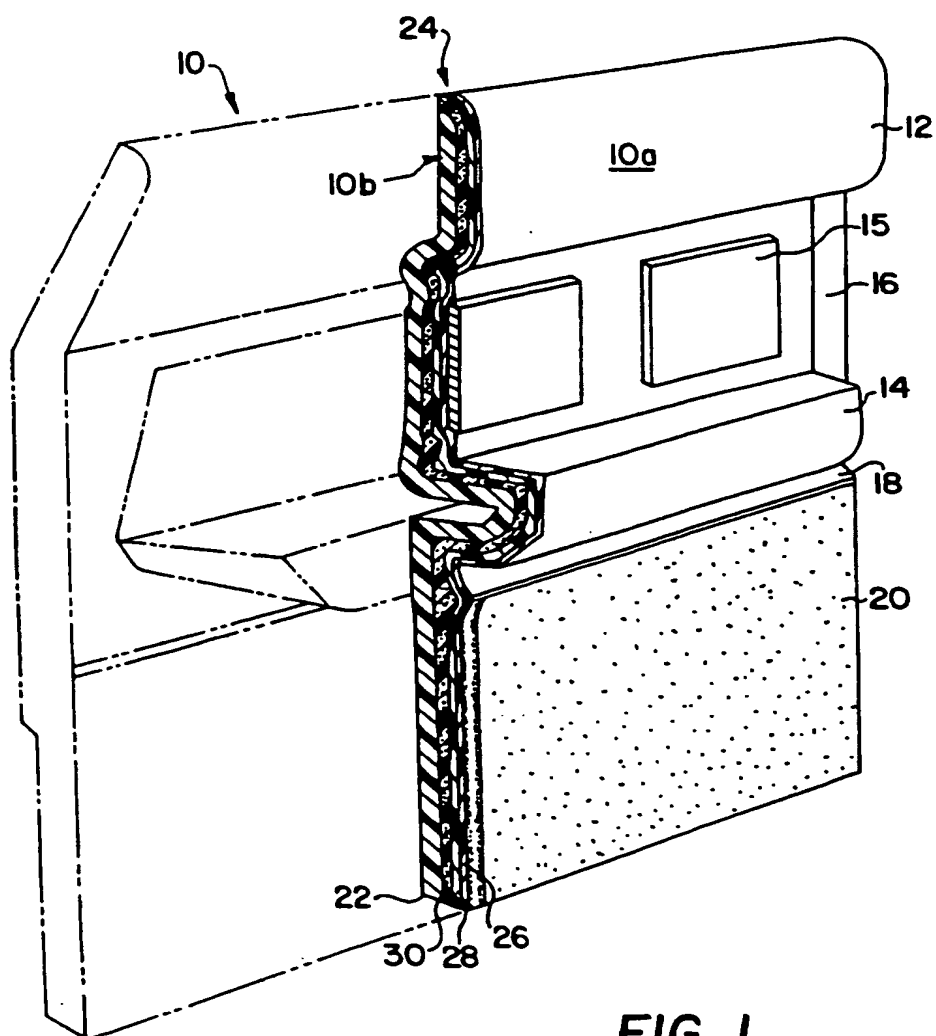

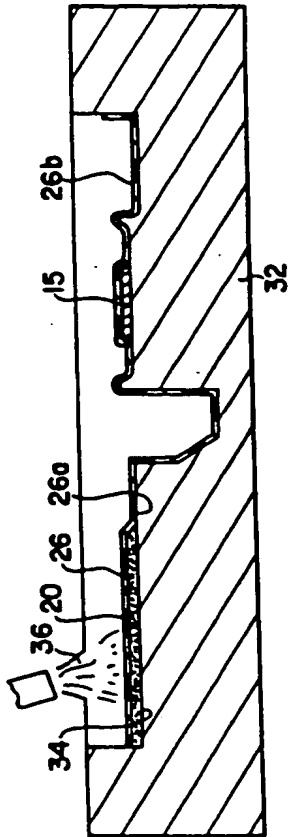


FIG. 2

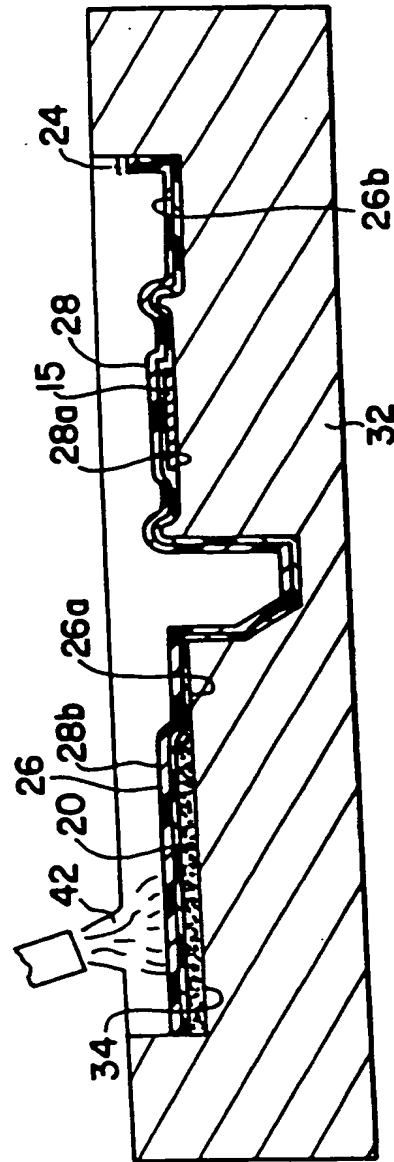


FIG. 3

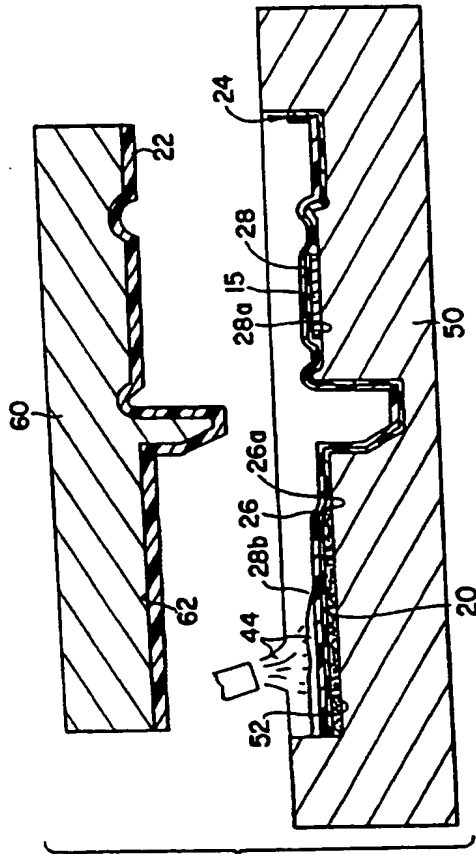


FIG. 4

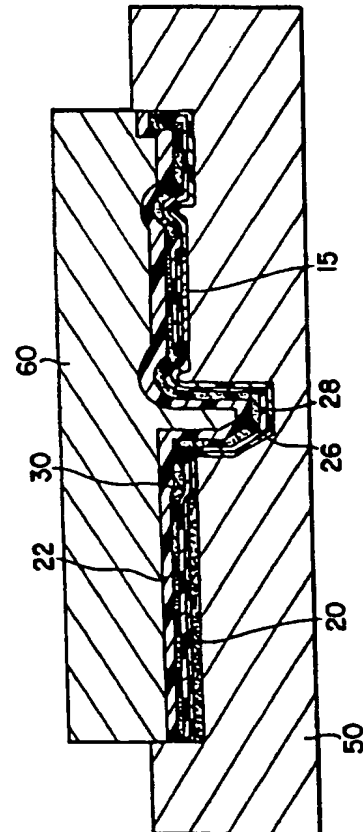


FIG. 5

# INTERNATIONAL SEARCH REPORT

Int'l Application No

PCT/CA 00/00708

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 7 B29C70/78 B29C39/10

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B29C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 073 325 A (GRAY JOHN D) 17 December 1991 (1991-12-17) column 1, line 63 - column 2, line 3 column 3, line 4 - line 12	1-8, 21
X	FR 2 151 651 A (ALTRAMOUSS ETS) 20 April 1973 (1973-04-20) page 1, line 1-5 page 2, line 27 - line 30 page 3, line 9 - line 17	1-8, 21

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

3 October 2000

Date of mailing of the international search report

13/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Van Wallene, A

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PC 1, CA 00/00708

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5073325	A	17-12-1991	NONE	
FR 2151651	A	20-04-1973	NONE	

# PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference <b>701570PCT</b>	<b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. <b>PCT/CA 00/ 00708</b>	International filing date (day/month/year) <b>13/06/2000</b>	(Earliest) Priority Date (day/month/year) <b>15/06/1999</b>
Applicant <b>MAGNA INTERIOR SYSTEMS, INC. et al.</b>		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

**1. Basis of the report**

a. With regard to the language, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

b. With regard to any nucleotide and/or amino acid sequence disclosed in the international application, the international search was carried out on the basis of the sequence listing:

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ Certain claims were found unsearchable (See Box I).

3. ☐ Unity of invention is lacking (see Box II).

4. With regard to the title,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the abstract,

☐ the text is approved as submitted by the applicant.

☒ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the drawings to be published with the abstract is Figure No.

☐ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☒ because this figure better characterizes the invention.

3

☐ None of the figures.

INTERNATIONAL SEARCH REPORT

PCT/CA 00/00708

Box III TEXT OF THE ABSTRACT (Continuation of Item 5 of the first sheet)

It is to be added references in parentheses as follows:

- line 3: ... components (15, 20)...
- line 4: ... components (15, 20)... surface (34), ...
- line 5: ... surface (34)...
- line 6: ... layer is sprayed (42)...

PCT/CA 00/00708

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 7 B29C70/78 B29C39/10		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols) IPC 7 B29C		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data, PAJ		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 073 325 A (GRAY JOHN D) 17 December 1991 (1991-12-17) column 1, line 63 - column 2, line 3 column 3, line 4 - line 12	1-8, 21
X	FR 2 151 651 A (ALTRAMOUSS ETS) 20 April 1973 (1973-04-20) page 1, line 1-5 page 2, line 27 - line 30 page 3, line 9 - line 17	1-8, 21
<input type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
<b>* Special categories of cited documents :</b>		
<b>*A*</b> document defining the general state of the art which is not considered to be of particular relevance		
<b>*E*</b> earlier document but published on or after the international filing date		
<b>*L*</b> document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)		
<b>*O*</b> document referring to an oral disclosure, use, exhibition or other means		
<b>*P*</b> document published prior to the international filing date but later than the priority date claimed		
<b>*T*</b> later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention		
<b>*X*</b> document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone		
<b>*Y*</b> document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.		
<b>*&amp;*</b> document member of the same patent family		
Date of the actual completion of the international search  3 October 2000		Date of mailing of the international search report  13/10/2000
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer  Van Wallene, A



Information on patent family members

PCT/CA 00/00708

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5073325	A	17-12-1991	NONE	
FR 2151651	A	20-04-1973	NONE	

## PATENT COOPERATION TREATY

## PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference <b>PE-3848</b>	<b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. <b>PCT/BR 00/ 00066</b>	International filing date (day/month/year) <b>23/06/2000</b>	(Earliest) Priority Date (day/month/year) <b>23/06/1999</b>
Applicant <b>RM MATERIAIS REFRATARIOS LTDA.</b>		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 2 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

## 1. Basis of the report

- a. With regard to the language, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any nucleotide and/or amino acid sequence disclosed in the international application, the international search was carried out on the basis of the sequence listing:

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ Certain claims were found unsearchable (See Box I).

3. ☐ Unity of invention is lacking (see Box II).

4. With regard to the title,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the abstract,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the drawing to be published with the abstract is Figure No.

☐ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

☒ Non of the figures.

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/BR 00/00066

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 C10L5/44

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C10L C13K D21B D21C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, COMPENDEX

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 338 366 A (GRACE TODD S ET AL) 16 August 1994 (1994-08-16) claims 1-29 ----	1-8
X	GB 1 569 138 A (VALKANAS GEORGE N;KOUKIOS EMMANUEL G) 11 June 1980 (1980-06-11) page 2, line 18 -page 3, line 26 ----	1-8
X	US 5 366 558 A (BRINK DAVID L) 22 November 1994 (1994-11-22) claim 1 ----	1-8
X	EP 0 265 111 A (ICI PLC) 27 April 1988 (1988-04-27) the whole document -----	1-8



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

4 October 2000

Date of mailing of the international search report

13/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Zuurdeeg, B

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/BR 00/00066

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5338366	A	16-08-1994	BR 9305401	A	26-07-1994
GB 1569138	A	11-06-1980	AR 221819	A	31-03-1981
			AU 504082	B	04-10-1979
			AU 1881076	A	27-04-1978
			BR 7607104	A	13-09-1977
			DE 2647910	A	05-05-1977
			EG 12428	A	30-06-1979
			ES 452669	A	01-04-1978
			FR 2328795	A	20-05-1977
			IN 146710	A	18-08-1979
			IN 145513	A	28-10-1978
			IT 1076827	B	27-04-1985
			JP 52081103	A	07-07-1977
			PT 65746	A, B	01-11-1976
			ZA 7606073	A	28-09-1977
US 5366558	A	22-11-1994	US 4384897	A	24-05-1983
			US 4706903	A	17-11-1987
			US 5221357	A	22-06-1993
			US 5536325	A	16-07-1996
			US 5628830	A	13-05-1997
			AU 550028	B	27-02-1986
			AU 5672580	A	25-09-1980
			CA 1175820	A	09-10-1984
			JP 55127999	A	03-10-1980
			NZ 193139	A	25-05-1982
			AU 562905	B	25-06-1987
			AU 9021682	A	02-06-1983
			BR 8206739	A	04-10-1983
			CA 1183790	A	12-03-1985
			JP 58098100	A	10-06-1983
			NZ 202537	A	30-04-1985
			PH 19542	A	20-05-1986
			AU 611399	B	13-06-1991
			AU 8124187	A	18-05-1989
			CA 1321283	A	17-08-1993
EP 0265111	A	27-04-1988	AT 73858	T	15-04-1992
			BR 8705576	A	24-05-1988
			CA 1309403	A	27-10-1992
			DE 3777530	D	23-04-1992
			DK 549587	A	21-04-1988
			ES 2033319	T	16-03-1993
			FI 874605	A, B,	21-04-1988
			US 5340403	A	23-08-1994